

ECO.50S

Kernboormachine

EUROBOOR

FOR PROFESSIONALS BY PROFESSIONALS

Technische data

	Metrisch	Imperiaal
Kernboren	Ø 12 - 50 mm	Ø 1/2" - 2"
Spiraalboren	Ø 1 - 23 mm	Ø 1/16" - 15/16"
Verzinken	Ø 10 - 55 mm	Ø 3/8" - 2 3/16"
Lengte	320 mm	12 5/8"
Breedte	200 mm	7 7/8"
Hoogte	445 - 615 mm	17 1/2" - 24 3/16"
Slag	170 mm	6 11/16"
Gewicht*	12 kg	26,5 lbs
Magneet (l x b x h)	168 x 84 x 42 mm	6 5/8" x 3 5/16" x 1 5/8"
Magnetische kracht	1.700 kg	3.750 lbs
Motor vermogen	1.250 W	11,4 A
Totaal vermogen	1.300 W	11,8 A
Toerental		(I) 380 rpm
(onbelast)		(II) 690 rpm
Toerental		(I) 235 rpm
(belast 1.250 W, 11,4 A)		(II) 415 rpm
Opname (Welding)	MT3 19,05 mm	MT3 3/4"
Krachtvoorziening	110 - 120 V / 60 Hz	
	220 - 240 V / 50 - 60 Hz	

* Zonder stroomkabel en hendels


Kenmerken



Olie bad
versnellingsbak



Magneet
LED-indicator
(SensorTec)

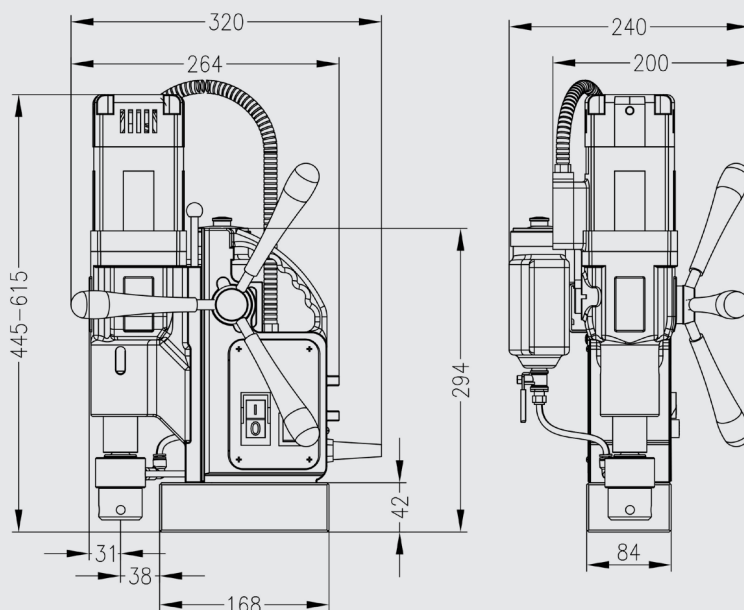

Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:



www.euroboor.com