ECO.i20


Magnetic drilling machine

EUROBOOR
FOR PROFESSIONALS BY PROFESSIONALS

Technical data

	Metric	Imperial
Annular cutting	Ø 12 - 200 mm	Ø 1/2" - 8"
Twist drilling	Ø 1 - 50 mm	Ø 1/16" - 2"
Countersinking	Ø 10 - 205 mm	Ø 3/8" - 8 1/16"
Tapping	M3 - M52	Ø 1/8" - 2 3/64"
Length	515 mm	20 9/32"
Width	265 mm	10 7/16"
Height	650 - 905 mm	25 19/32" - 35 5/8"
Stroke	255 mm	10 3/64"
Weight*	58.5 kg	129 lbs
Magnet (l x w x h)	350 x 125 x 66 mm	13 25/32" x 4 59/64" x 2 19/32"
Magnetic force	3,680 kg	8,113 lbs
Motor power	2,800 W	25.0 A
Total power	2,950 W	26.3 A
Speed (no load)	(I) 39 - 110 rpm (II) 87 - 248 rpm (III) 146 - 413 rpm (IV) 327 - 916 rpm	
Speed (load 2,800 W)	(I) 35 - 106 rpm (II) 79 - 238 rpm (III) 132 - 400 rpm (IV) 294 - 883 rpm	
Spindle (Weldon)	MT4 31.75 mm	MT4 1 1/4"
Voltage	110 - 120 V / 60 Hz 220 - 240 V / 50 - 60 Hz	

* Without power cord and handles

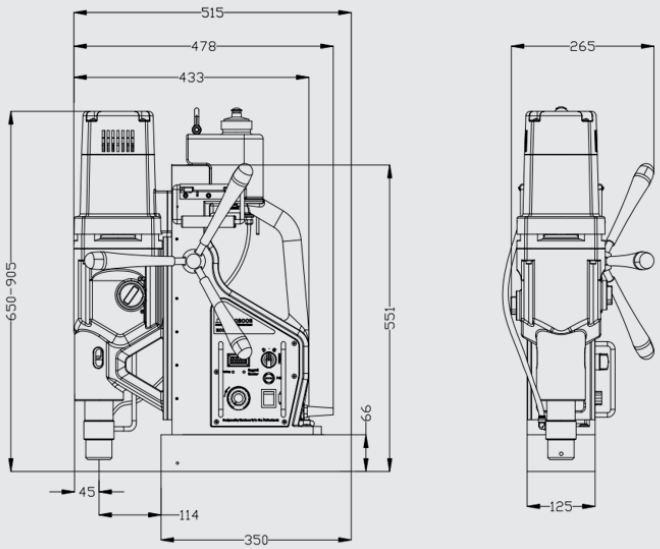



Features

- Adjustable speed
- R/L rotation
- Overload protection
- Overheat protection
- Power surge protection
- Power fluctuation protection
- Gyro-Tec
- Integrated motor cable
- Induction motor
- Brushless motor
- Oil lubricated gearbox
- Digital display
- Magnet LED-indicator (SensorTec)
- Tapping
- Intelligent RPM control

Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:

www.euroboor.com