

# ECO.130S/T

## Magnetic drilling machine


**EUROBOOR**  
FOR PROFESSIONALS BY PROFESSIONALS

### Technical data

	Metric	Imperial
Annular cutting	Ø 12 - 130 mm	Ø 1/2" - 5 1/8"
Twist drilling	Ø 1 - 45 mm	Ø 1/16" - 1 25/32"
Countersinking	Ø 10 - 135 mm	Ø 3/8" - 5 5/16"
Tapping	M3 - M39	1/8" - 1 17/32"
Length	595 mm	23 7/16"
Width	260 mm	10 1/4"
Height	520 mm - 785 mm	20 7/16" - 30 15/16"
Stroke	260 mm	10 1/4"
Weight*	32.9 kg	72.5 lbs
Magnet (l x w x h)	330 x 110 x 66 mm	12 31/32" x 4 5/16" x 2 19/32"
Magnetic force	2000 kg	4410 lbs
Motor power	2000 W	18.2 A - 110 V / 60 Hz
Total power	2100 W	19.1 A - 110 V / 60 Hz
Speed (no load)		(I) 40 - 105 rpm (II) 60 - 170 rpm (III) 130 - 350 rpm (IV) 210 - 565 rpm
Speed (load 2000 W, 18.2 A)		(I) 30 - 85 rpm (II) 50 - 150 rpm (III) 100 - 260 rpm (IV) 170 - 460 rpm
Spindel (Weldon)	MT4 - 31.75 mm	MT4 - 1 1/4"
Voltage		110 - 120 V / 60 Hz 220 - 240 V / 50 - 60 Hz

\* Without power cord and handles

### Features

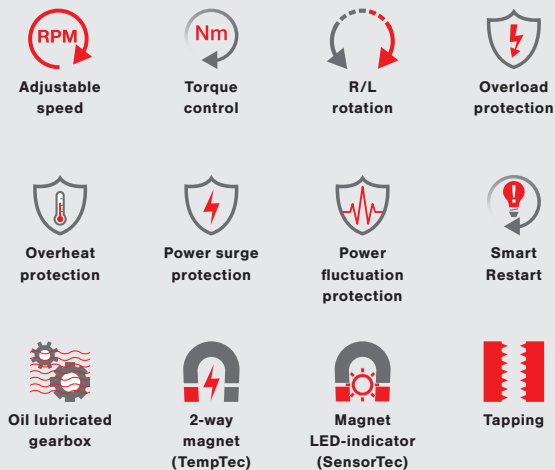

Euroboor makes every effort to meet quality and integrity requirements. That is why we as an organization are proud of the recognition of some leading organizations worldwide:



[www.euroboor.com](http://www.euroboor.com)