

RAIL.360

Accu rail kernboormachine

EUROBOOR
FOR PROFESSIONALS BY PROFESSIONALS

Technische data

	Metrisch	Imperisch
Kernboren	Ø 12 - 36 mm	Ø 7/16" - 1 7/16"
Lengte	297 mm	11 11/16"
Breedte	125 mm	4 15/16"
Hoogte	510 - 685 mm	20 1/16" - 27"
Slag	230 mm	9 1/16"
Gewicht*	13,04 kg	28,75 lbs
Motor vermogen	1.300 W DC	35,1 A DC
Toerental (onbelast)	506 rpm	
Toerental (belast, 1.300 W, 35,1 A DC)	375 rpm	
Opname (Weldon)	19,05 mm	3/4"
Batterij capaciteit	37 V / 6 Ah Li-ion	

* Zonder hendels, railadapter, batterij



Opladen van 0% to 75%
in 39 minuten!

Kenmerken



Overbelastings-
beveiliging




Oververhittings-
beveiliging



Borstelloze
motor



Batterij
aangedreven

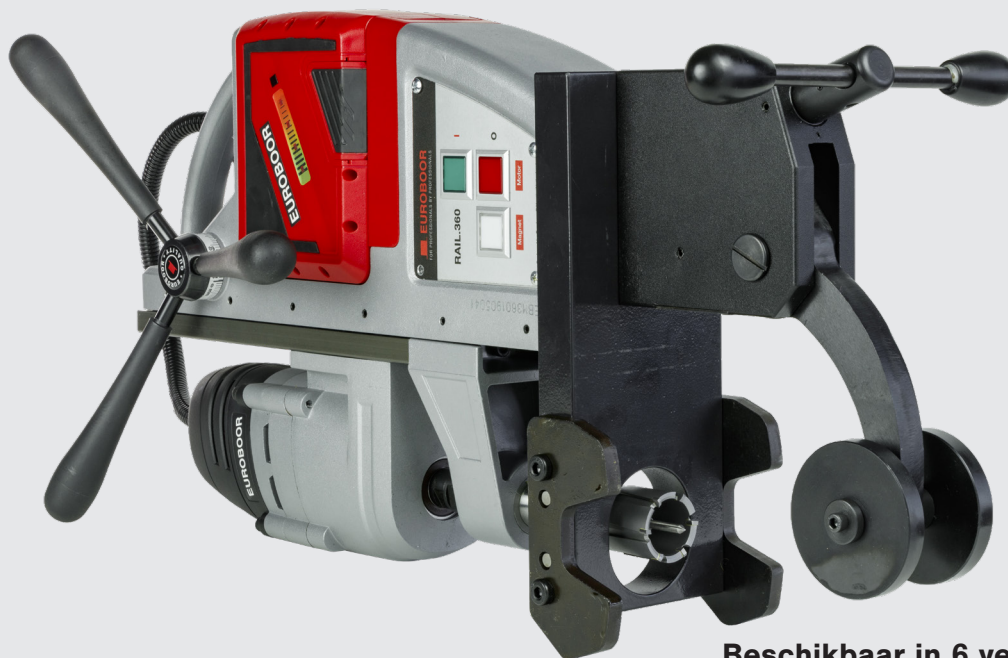

Euroboor stelt alles in het werk om te voldoen aan kwaliteits- en integriteitseisen. Daarom zijn wij als organisatie trots op de erkenning van enkele toonaangevende instanties wereldwijd:



Beschikbaar in 6 verschillende
railadapter uitvoeringen:
S49, S54, TR68, UIC50, UIC54 en UIC60.

www.euroboor.com